

AFOSR 67-1895

AN EXPERIMENTAL METHOD FOR THE STUDY OF INTERACTIONS
BETWEEN DETONATION WAVES AND MAGNETIC FIELDS

By
Eric Arthur Lundstrom

P. A. Urtiew
Project Director

A. K. Oppenheim
Faculty Investigator

Technical Note No. 3-67
Grant AFOSR 129-67
Report No. AS-67-7

June 1967

COLLEGE OF ENGINEERING
UNIVERSITY OF CALIFORNIA, Berkeley

Distribution of this
document is unlimited

OFFICE OF RESEARCH SERVICES

University of California
Berkeley, California 94720

AN EXPERIMENTAL METHOD FOR THE STUDY OF INTERACTIONS
BETWEEN DETONATION WAVES AND MAGNETIC FIELDS

By
Eric Arthur Lundstrom

P. A. Urtiew
Project Director

A. K. Oppenheim
Faculty Investigator

Technical Note No. 3-67
Grant AFOSR 129-67
Report No. AS-67-7

June 1967

ABSTRACT

Reported here is the design and construction of an experimental apparatus for the study of the influence of electromagnetic fields on the structure of detonation waves. The apparatus consists of a detonation tube having a 3/4 inch square test section with axial magnetic and transverse electric fields. The structure of the detonation wave is recorded by the use of the soot film technique.

TABLE OF CONTENTS

Abstract	i
Table of Contents	ii
Acknowledgment	1
Introduction	2
Apparatus	3
Preliminary Experiments	6
Conclusions	7
References	8
Figure Captions	9
Figures	11
Appendix	21

ACKNOWLEDGMENT

The author extends his gratitude to the entire personnel of Propulsion Dynamics, particularly Messrs. Jim Smolen, Mostafa Kamel, Val Vesninsky, and Ken Horn, for their contributions to the project. The magnet was designed and wound with the assistance of Don Nelson, Ron Holsinger and Lou Biagi of the Lawrence Radiation Laboratory.

INTRODUCTION

The first comprehensive study of the interaction between detonation waves and electric and magnetic fields was made by Bone, Fraser and Wheeler ⁽¹⁾ in 1935. In their investigation a rotating drum camera was used to record changes in the velocity and spin in $\text{CO} + \text{O}_2$ detonations due to transverse magnetic, axial magnetic and axial electric fields. More recently the interaction between detonation waves and electromagnetic fields became a subject of numerous studies, notably those of Toong and his students at M.I.T. ⁽²⁾ who investigated some overall aspects of the process for a possible application as an energy conversion system.

In the meantime stroboscopic laser-schlieren photography has given detailed information on the multi-wave character of the detonation front ⁽³⁾. Traces, left by the wave intersections on a soot covered wall of the detonation tube, have also provided a valuable means of obtaining a qualitative description of the evolution of the wave structure ⁽⁴⁾. In addition, graphical methods have been formulated for the analysis of wave intersections associated with the detonation front ⁽⁵⁾.

In light of these developments it has become of interest to investigate the effects of the electromagnetic fields on the structure of the detonation wave. To this end an apparatus has been built, which utilizes the soot film technique, to study such effects in the case of axial magnetic and transverse electric fields.

The design and construction of this apparatus is presented here. Preliminary experiments have been performed in argon diluted acetylene-oxygen mixtures to test its operation, but no observation has been made yet of the effects of the interaction between the electromagnetic field and the wave structure.

APPARATUS

A schematic diagram of the entire apparatus is shown in Fig. 1. The detonation tube consists of a 4 foot stabilization section, which is connected to a 5 foot test section. In operation the driver is filled with a detonable mixture which is ignited at the closed end with a spark gap. The resulting explosion bursts the diaphragm, producing an overdriven detonation wave at the beginning of the stabilization section. This wave decays within 3 or 4 feet to a steady detonation which then propagates through the tube.

The test section is constructed out of 1/2 inch thick plexiglass to form a rectangular tube with internal dimensions of $60 \times 1 \frac{1}{4} \times \frac{3}{4}$ inch. Two copper electrodes, $24 \times 1 \frac{1}{4}$ inches, are imbedded in opposite walls in the center of the tube. A removable $\frac{1}{2} \times \frac{3}{4}$ inch plexiglass bar runs the length of the tube and reduces its cross section to $\frac{3}{4} \times \frac{3}{4}$ inch. Before each experiment, the bar is covered with a thin film of kerosene soot. The test section is centered in the magnet so that the soot records the structure of the detonation wave in its original, perturbed and relaxing states. Shop drawings of the tube are enclosed in the Appendix.

A steady, wide kerosene flame is used to apply soot directly onto the plexiglass bar. To insure controllable soot thickness and consistency, a "soot machine" has been constructed, which consists simply of a rail-mounted movable support for the bar and an adjustable stand for the kerosene burner. This device permits the bar to be drawn smoothly through the flame. Photographs of the soot records are made by inserting the bar directly into a photographic enlarger and printing from it as from a negative.

Use is made of a recently developed continuous flow gas mixing device⁽⁶⁾ to supply the required explosive mixtures for the driver and driven sections of the detonation tube. A schematic of the flow system is presented in Fig. 2.

In operation the needles are in a choked flow condition so that the flow rate depends only on the upstream stagnation pressure. The flow mixing system has been chosen for its versatility, ease of operation and relative safety, as compared to the conventional batch mixing chamber gas supply.

A magnet has been designed and constructed to produce an axial field that is uniform to within 5% over a distance of 10 inches along the tube. The field profile is displayed in Fig. 3. With the use of a 32kJ capacitor bank a maximum field intensity of 19kG has been obtained. As shown in Fig. 4, the magnet is composed of three separate coils wound on a single spool. The outer coils consist of 10 layers with 11 windings per layer and the inner coil consists of 8 layers with 8 windings per layer. This geometry allows the inclusion of two 3 inch ports for optical access across the tube in the interior of the magnetic field.

The magnet geometry was determined by means of a computer program which could vary the parameters of a trial coil configuration to provide a least squares fit of the field distribution to a uniform 10 inch field. Since optical measurements were anticipated, a trial configuration consisting of three coils was used. A compromise between field uniformity, field strength and available spool materials fixed the internal diameter of the coils at 8 3/4 inches. The computer then adjusted the coil sizes and spacings to provide the optimum field distribution.

The coils were wound with 1/4 inch square, cotton insulated copper wire, each winding being saturated with a mixture of 815 Epon epoxy resin and 11% by weight of agent D catalyst. To insure against internal electrical breakdown, the layers of wire were separated by an epoxy saturated, double layer of fiberglass cloth. The magnet spool was made out of type G-10 epoxy fiber laminate, and the coils were held apart by braces of the same material. Shop drawings of the magnet spool are included in the Appendix.

The magnet was mounted in a large box as depicted in Fig. 5. The shaded areas represent 1/32 inch sheet metal which lines the interior and provides shielding for the magnetic field. The box is constructed out of 1/2 inch plywood and braced with angle iron; it is supported by a metal stand with adjustable legs that permit vertical alignment. As an added safety precaution, a compartment has been added to the box for the installation of most of the high voltage components.

The field has been calibrated by resonating the magnet with the capacitor bank and then measuring the voltage across a small 80 turn coil placed at various positions along the magnet axis. The time dependent behavior of the field during an experiment is monitored by integrating the voltage across another coil attached permanently to the magnet.

The modified crowbar circuit, shown schematically in Fig. 6, is used both to activate the magnet and to produce an electric field between the electrodes in the test section. With reference to Fig. 7, its operation is as follows. Initially the capacitor bank is charged to $-V_0$. The gas is ignited in the driver and the resulting detonation wave is detected by an ion gap which then triggers ignitron A. This discharges the capacitor bank through the magnet. At a later time, when the magnet voltage (V_m) has reversed polarity and field strength has just passed its maximum, ignitron B is fired. This switches the magnet current through the electrodes and the shunt resistor (R_s). On the time scale of the experiment the magnet acts as constant current source so that a large range of electrode voltages (V_e) may be obtained by adjusting the shunt resistor.

PRELIMINARY EXPERIMENTS

Preliminary experiments with this apparatus have been made using the mixture of $2\text{C}_2\text{H}_2 + 3\text{O}_2 + 11\text{A}$ at an initial pressure of 22mm at room temperature. It has been found that detonation waves propagating in the single mode (the equivalent of detonation spin in a square cross section tube) in this mixture make excellent soot records and are extremely stable and reproducible, so that any perturbations due to the electromagnetic field could be easily observed. A soot record of the unperturbed wave is shown in Fig. 8. The dark lines in the photograph correspond to the traces left by the wave intersections that occur in the detonation front which propagates from left to right. The unusual structure of this wave may be interpreted as a coupling between the spinning mode ⁽⁷⁾, usually found in a circular cross section tube, and the transverse waves of a rectangular tube ⁽⁴⁾.

Soot records from experiments with a magnetic field of 16kG and an electric field corresponding to a potential of 1kV imposed across the 3/4 inch width of the test section are shown in Fig. 9. Pictures of oscilloscope traces of the magnetic field strength, magnet voltage and electrode potential are displayed in Fig. 10. Although the oscilloscope records were obtained from different experiments, their repeatability was sufficiently good to establish the simultaneity of the results in Fig. 10. It is evident from the soot records that the wave structure of the detonation front has not been disturbed by the presence of the electromagnetic fields.

CONCLUSIONS

An apparatus for the study of the interaction between detonation waves and electromagnetic fields has been designed and constructed. It consists of a shock driven detonation tube and a magnet with a capacitor energy source and the auxiliary switching circuits.

Preliminary experiments have been performed to test the operation of the apparatus, but no effect of the electromagnetic field on the detonation wave has been, as yet, observed.

An interesting set of soot records of detonation waves in the single mode (the equivalent of detonation spin in a square cross section tube) has been obtained. Future plans call for experimentation with significantly higher electric and magnetic fields than the 2kV/cm and 16kG attained in the preliminary experiments, as well as for modification of the geometry of the interaction process by changing the direction of the magnetic field from axial to transverse.

REFERENCES

1. Bone, W. A., Fraser, A. P., Wheeler, W. H., Phil. Trans. Roy. Soc. (London), A, 235, 29-68, 1935.
2. Plett, E. G., "Joule Heating and Lorentz Force Effects on Gaseous Detonation Flow Fields", Ph.D. Thesis, M.E. Dept., M.I.T., 1966.
3. Urtiew, P. A., Oppenheim, A. K., "Experimental Observations of the Transition to Detonation in an Explosive Gas", Proc. Roy. Soc., A, 295, 13-28, 1966.
4. Steel, G. B., "Experimental Study of the Wave Structure of Marginal Detonation in a Rectangular Tube", University of California, Berkeley, Rept. No. AS-66-4, January 1966.
5. Oppenheim, A. K., Smolen, J. J., "Vector Polar Method for the Analysis of Wave Intersections", University of California, Berkeley, Report No. AS-66-16, November 1966.
6. Kamel, M. M., Lundstrom, E. A., "Continuous Gas Mixing by the Use of Critical Flow Through Small Diameter Tubes", University of California, Berkeley, Rept. No. AS-67-3, March 1967.
7. Schott, G. L., "Observations of the Structure of Spinning Detonation", Phys. Fluids, 8, 5, 850-865, 1965.

FIGURE CAPTIONS

- Fig. 1 Schematic Diagram of the Apparatus
- Fig. 2 Schematic Diagram of the Flow Mixing Device
- Fig. 3 Profile of the Magnetic Field Strength - The reference field strength, B_0 , is given by the relation $B_0(\text{kG}) = .97V_0(\text{kV})$, where V_0 is the voltage across the 160 F energy storage capacitor bank.
- Fig. 4 Assembly of the Magnet
- Fig. 5 Magnet Enclosure
- Fig. 6 Switching Circuits
- Fig. 7 Detonation Wave Diagram with Plots of Magnet Field Strength (B), Magnet Voltage (V_m), and Electrode Voltage (V_e).
- Fig. 8 Soot Records of Single Mode Detonation without Electromagnetic Fields - The detonation propagates from left to right in a mixture of $2\text{C}_2\text{O}_2 = 3\text{O}_2 + 11\text{A}$ at an initial pressure of 22mmHg and at room temperature. The record is taken from one wall of a $3/4 \times 3/4$ inch cross section tube.
- Fig. 9 Soot Records of Single Mode Detonation with Electromagnetic Fields - The records have been taken under the same conditions as those shown in Fig. 8 under the action of an axial magnetic field of 16kG and an electric field corresponding to a potential of 1kV imposed across the $3/4$ inch width of the tube.
- Fig. 10 Oscilloscope Records from Experiments with Single Mode Detonation and Electromagnetic Fields
- | | |
|----------------------------|---------------------------------------|
| a) Magnetic Field Strength | Vertical scale: 1 division = 4.0kG |
| | Horizontal scale: 1 division = .5msec |
| b) Magnet Voltage | Vertical scale: 1 division = 5kV |
| | Horizontal scale: 1 division = .5msec |


c) Electrode Potential

Vertical scale: 1 division = 200V


Horizontal scale: 1 division = .1msec


Ignitron A is fired at T_a and ignitron B is fired at T_b .


SCHEMATIC OF FLOW SYSTEM

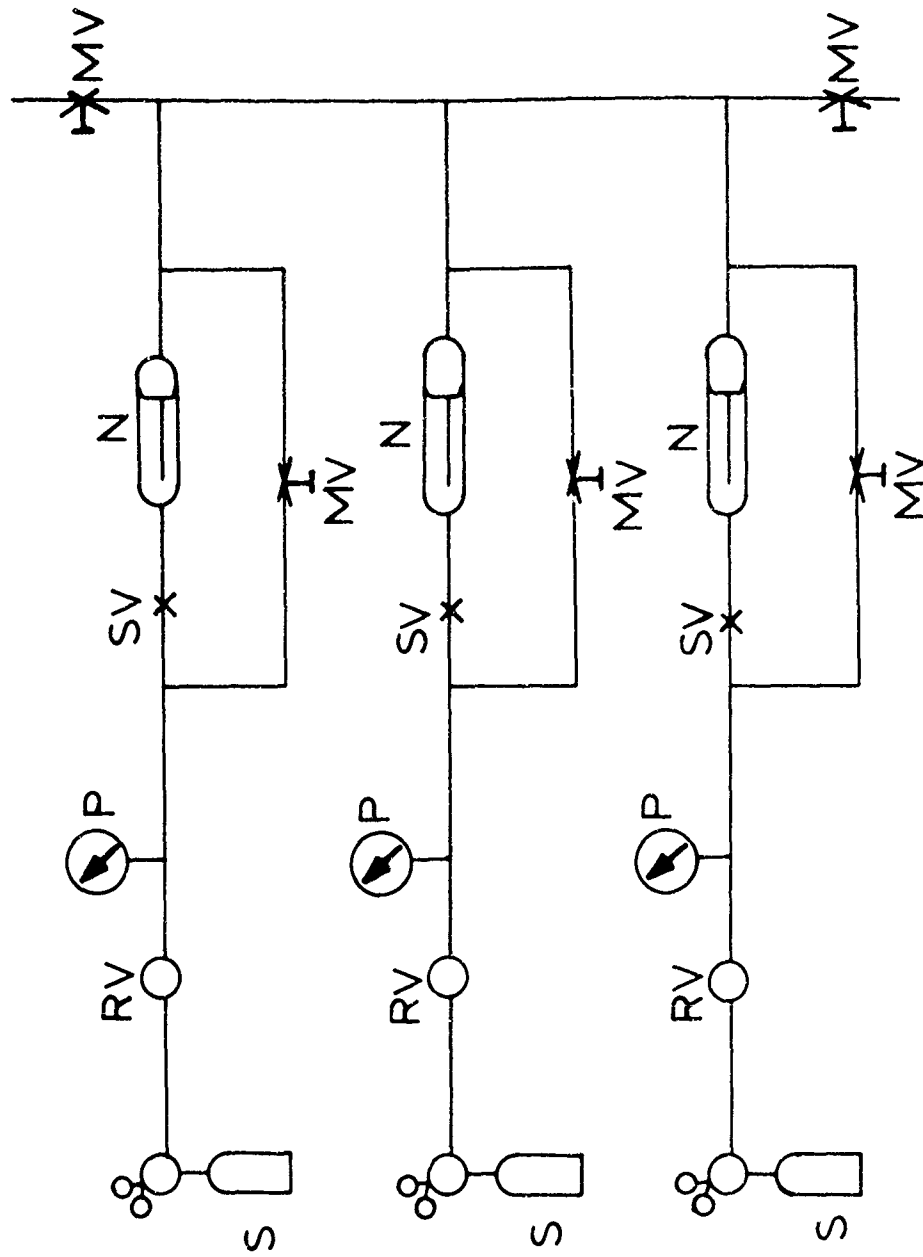



MV Manual Valve P Pressure Gauge S Gas Supply
 N Needle Holder RV Regulating Valve SV Solenoid Valve

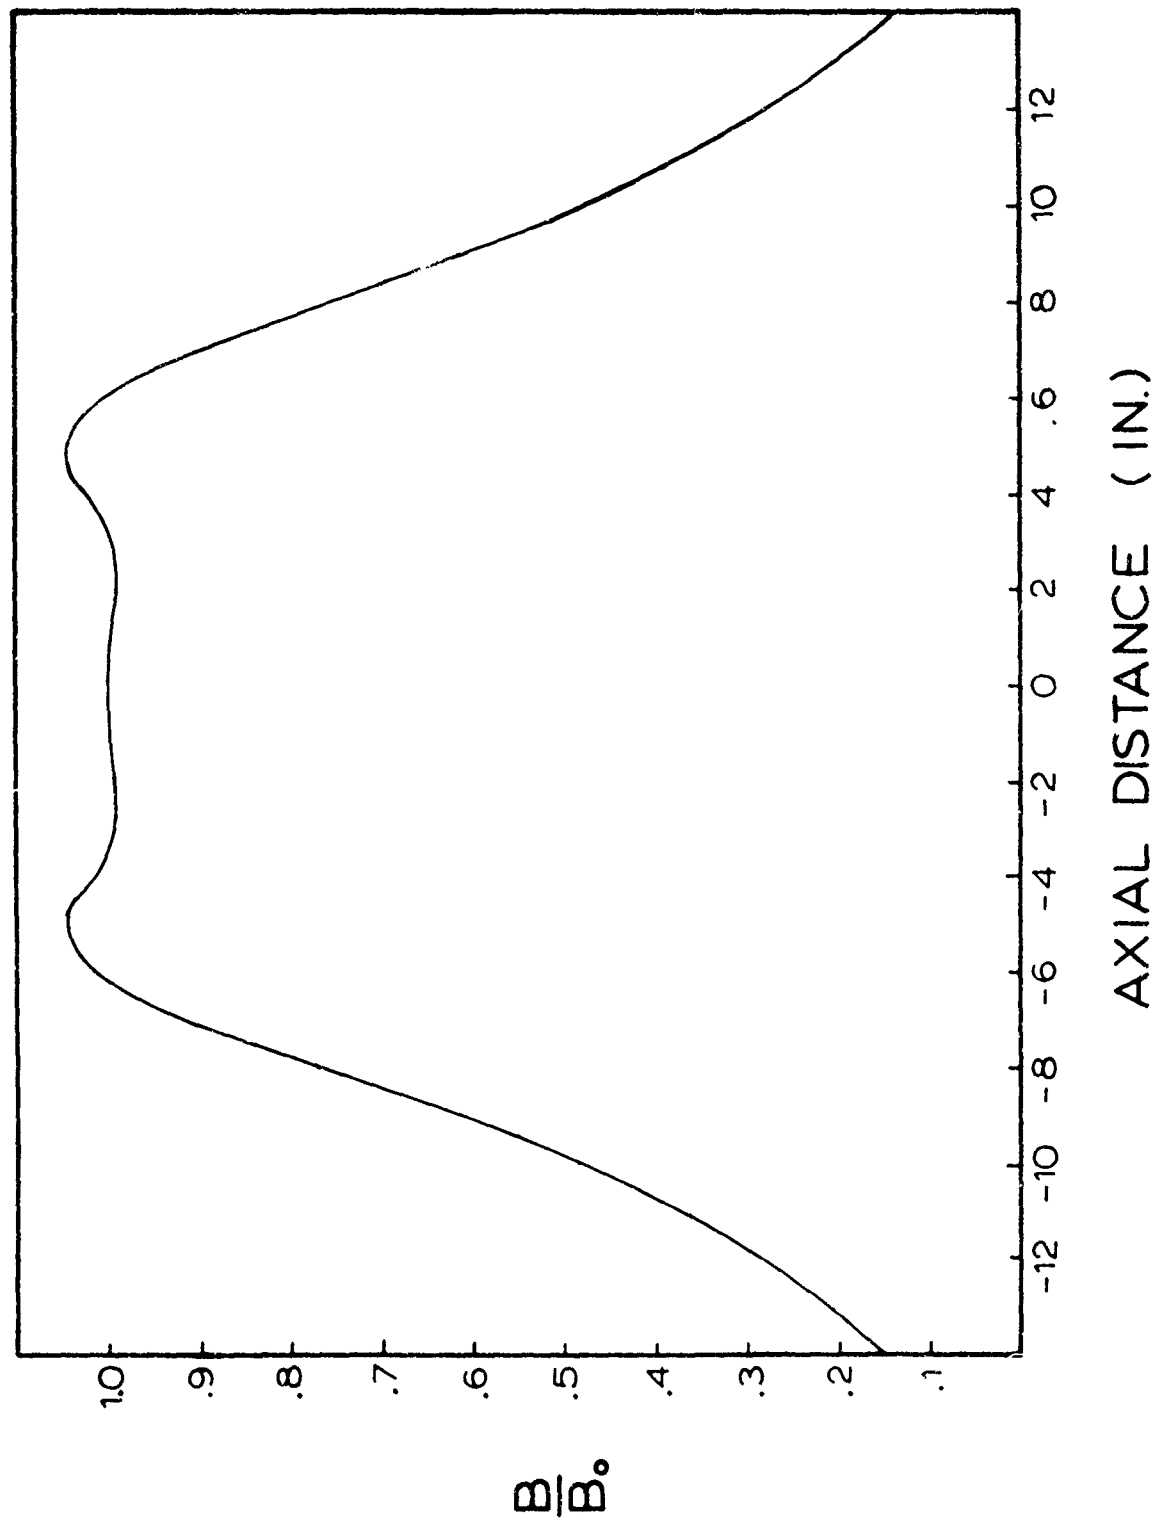

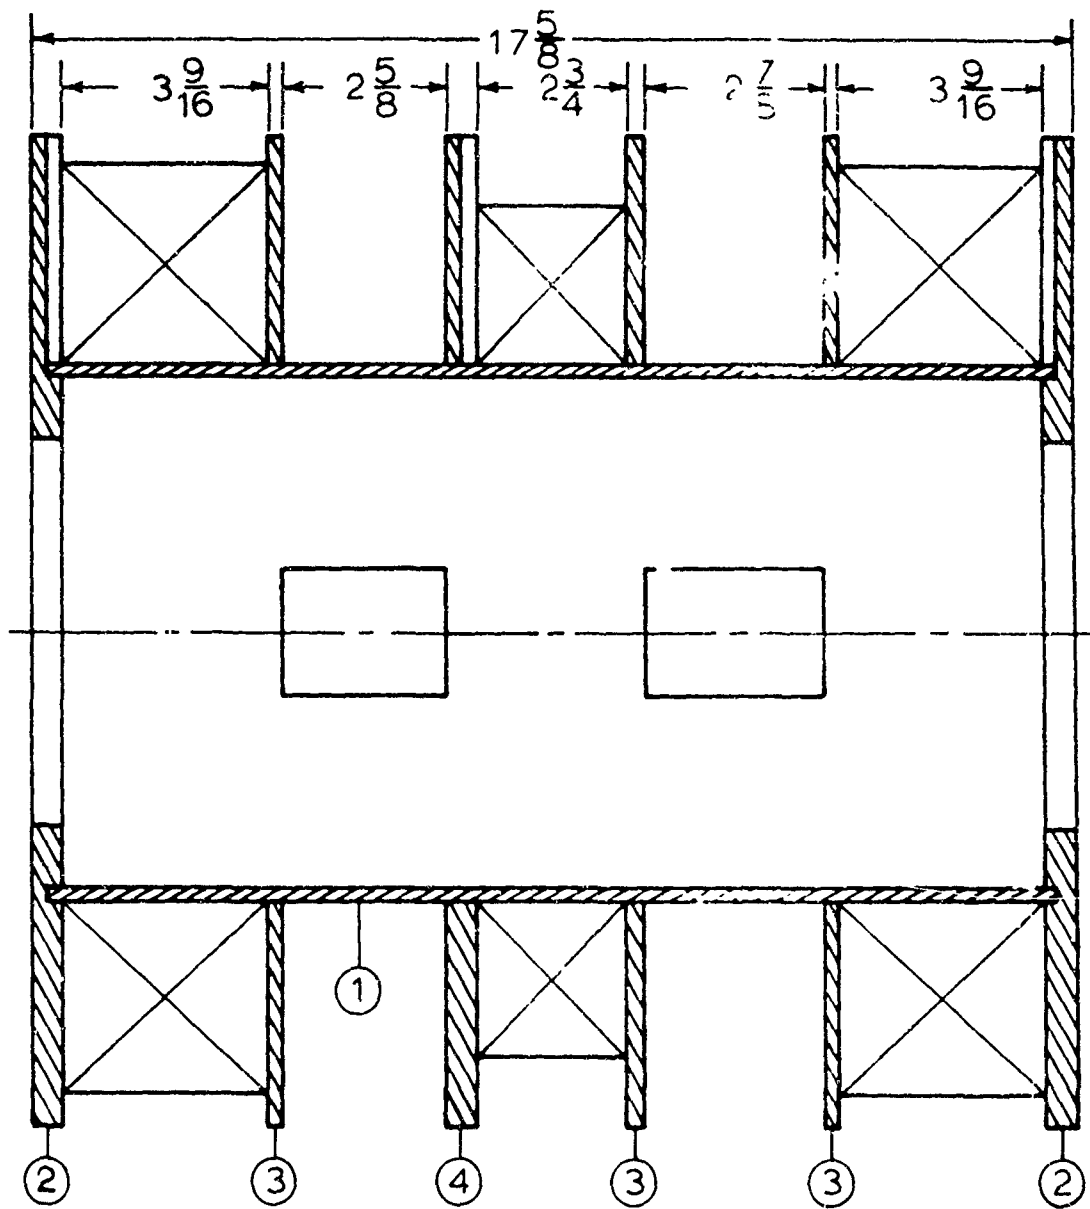



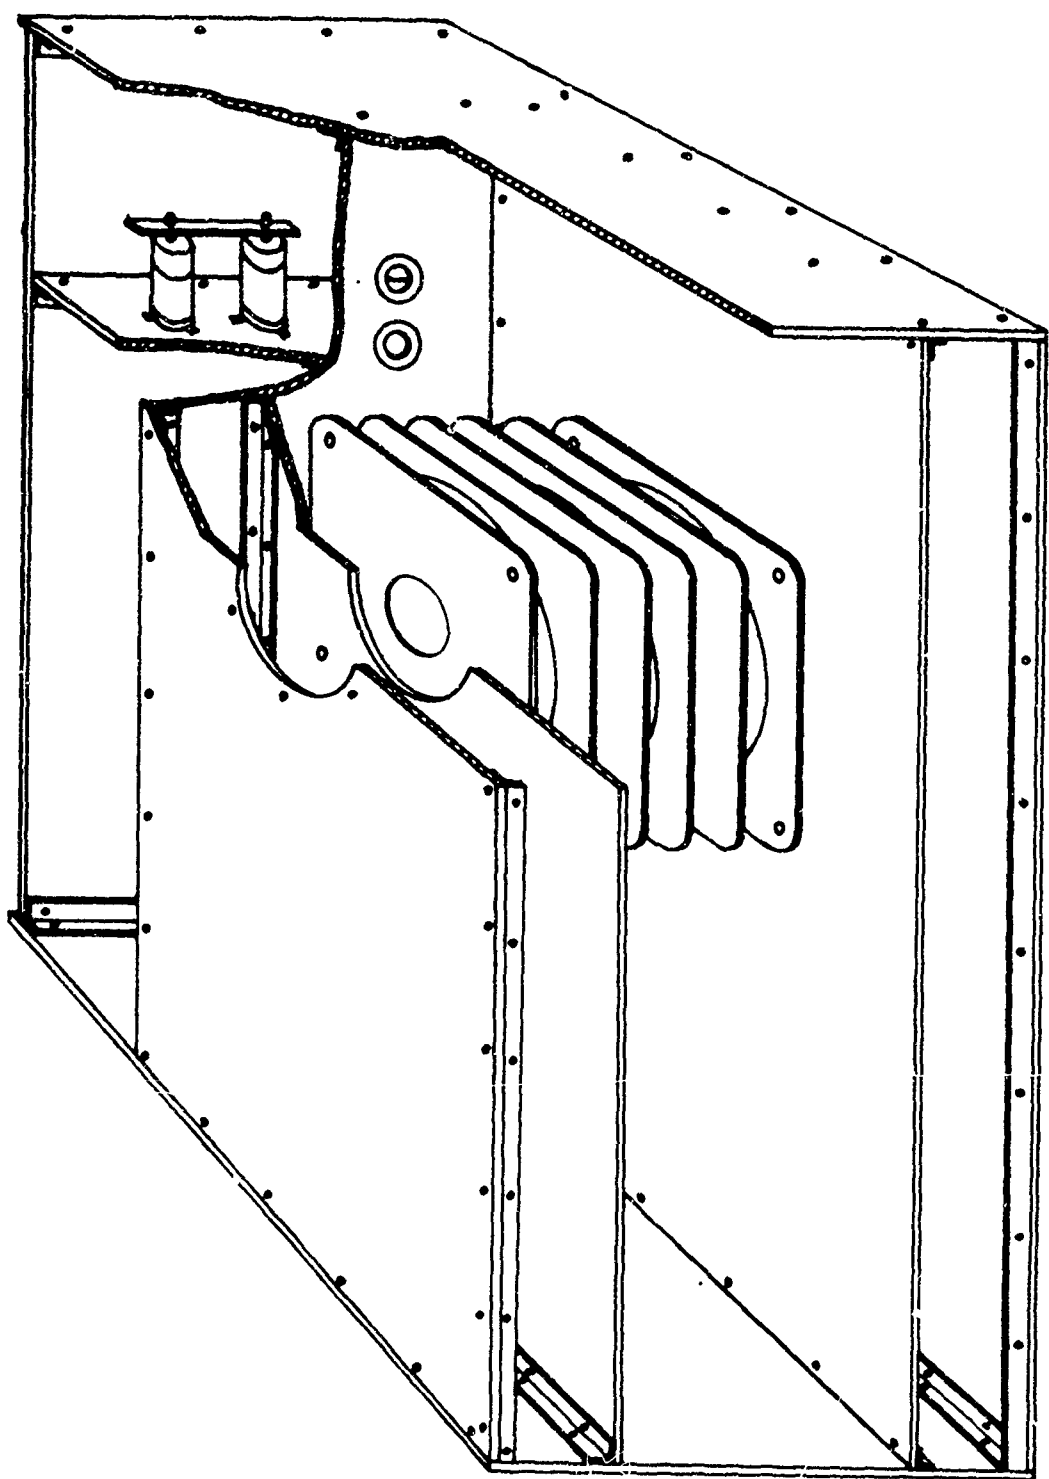


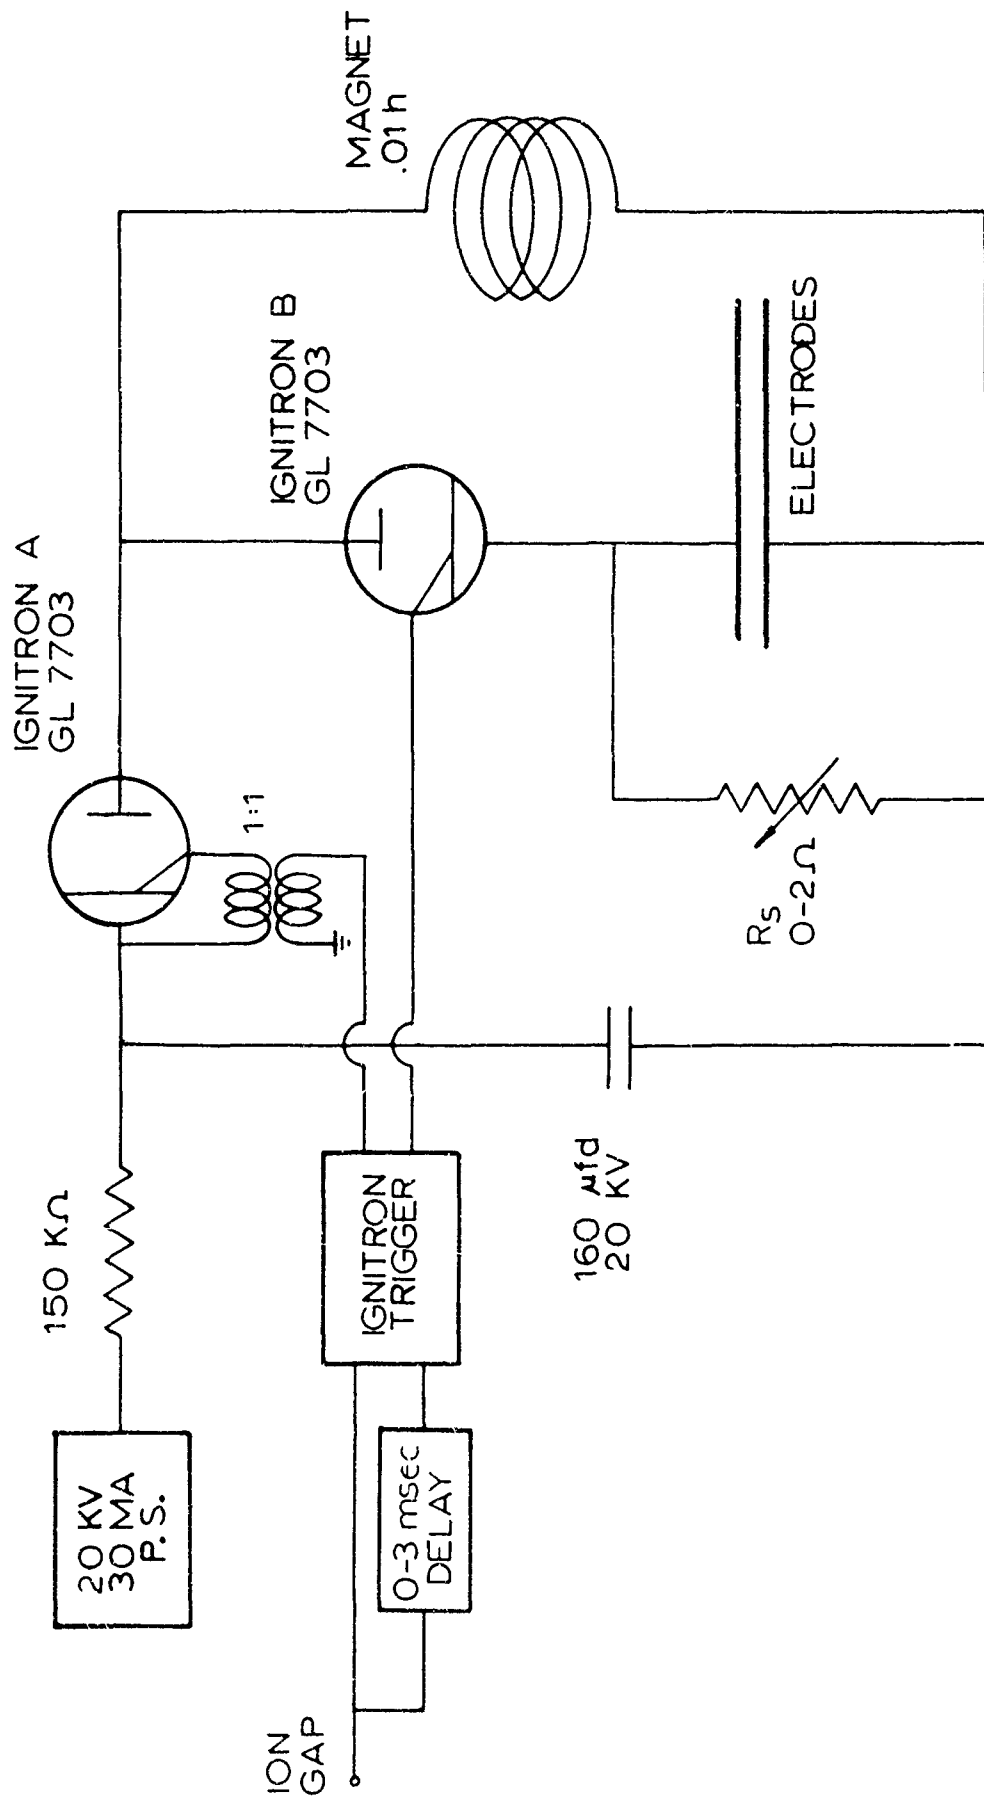

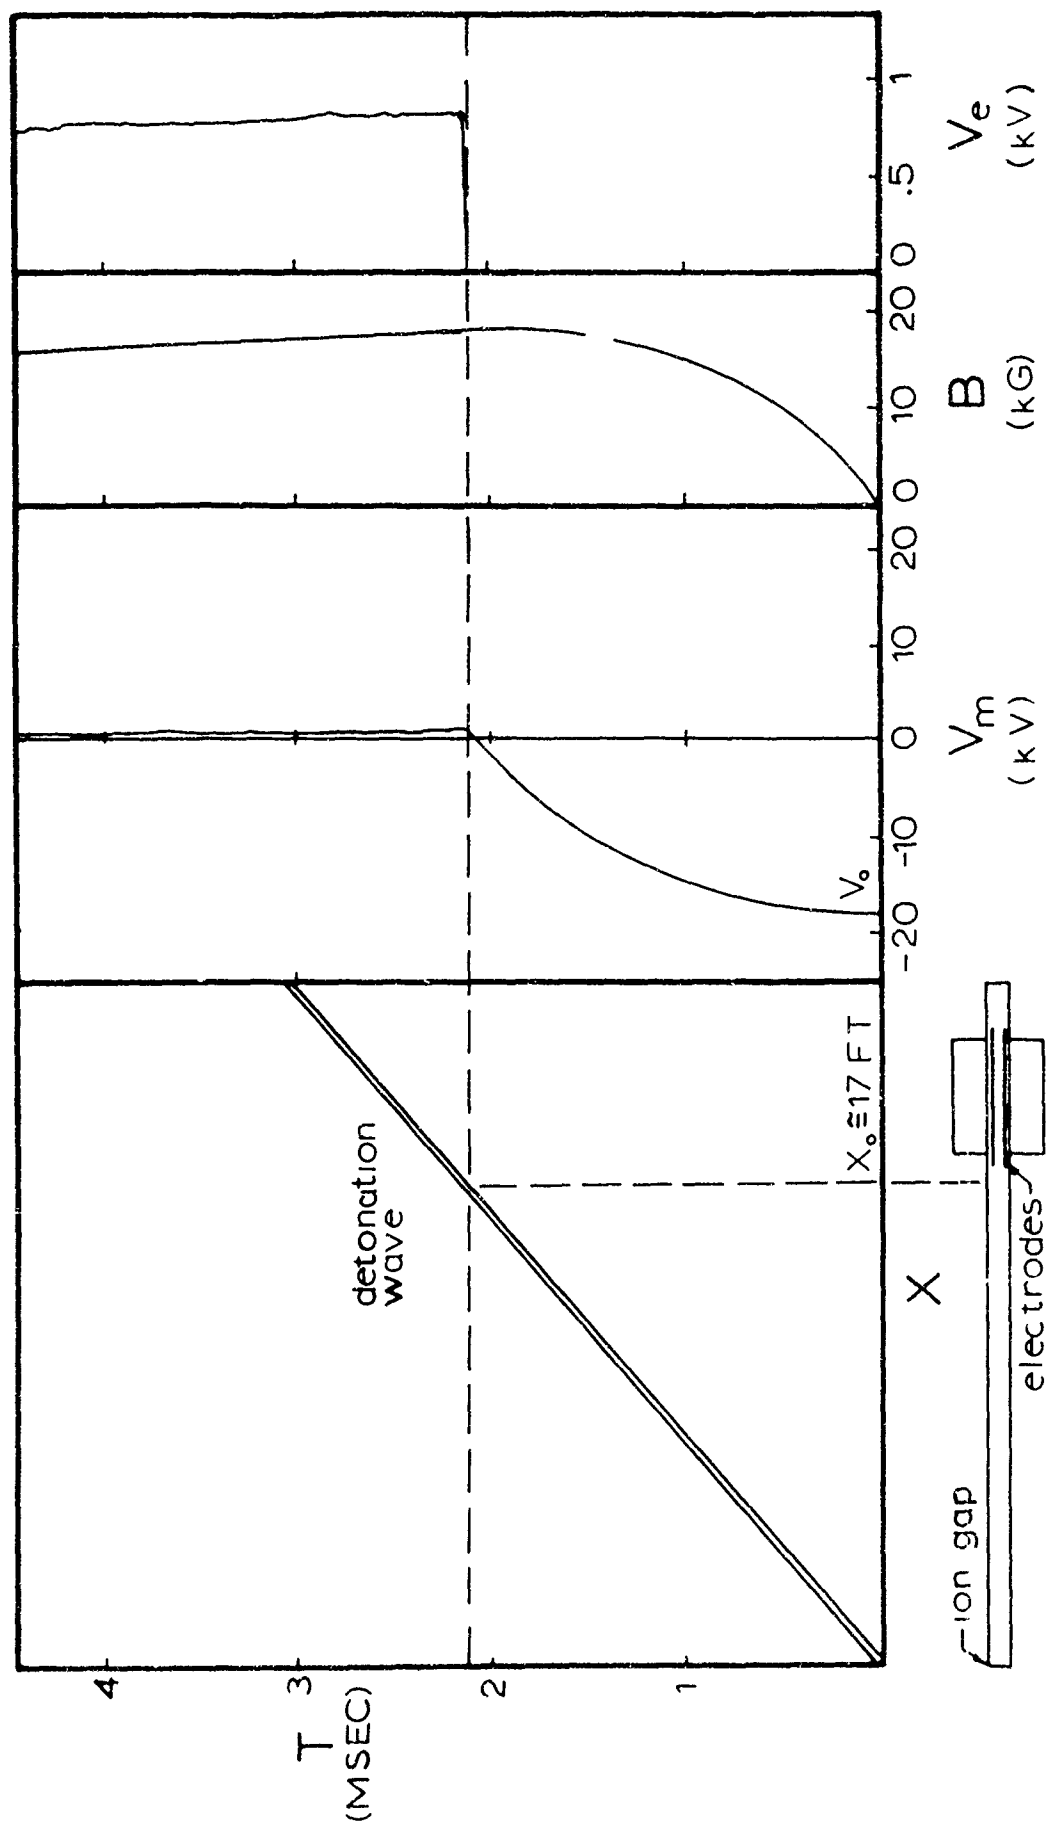






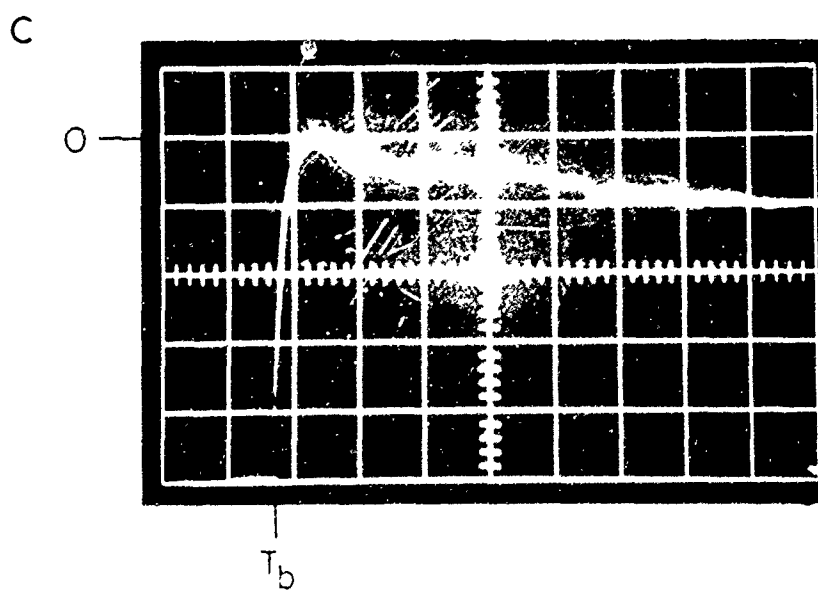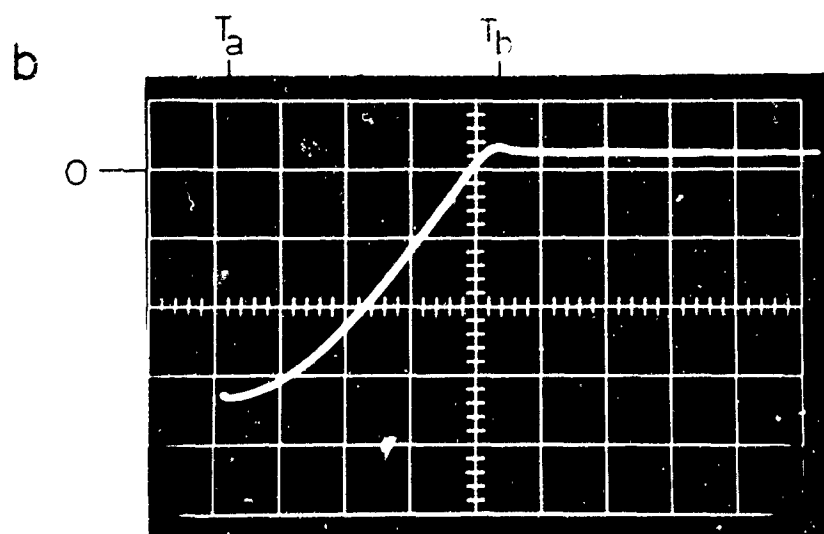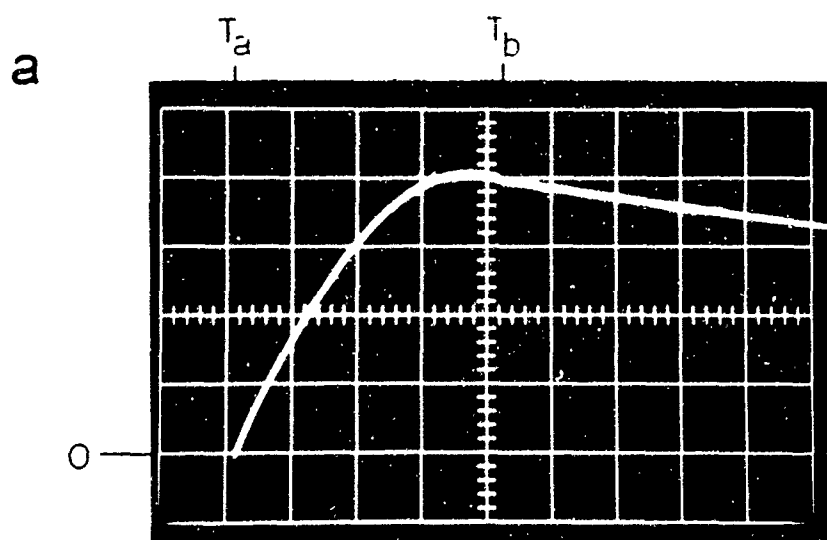


APPENDIX

Shop Drawings


- Fig. 1 Driver Section
- Fig. 2 Stabilization Section
- Fig. 3 Test Section Assembly
- Fig. 4 - 7 Test Section Details
- Fig. 8 - 11 Magnet Spool Details. An assembly drawing of the
spool is shown in Fig. 4 of the text.






SECTION A-A




SECTION B-B

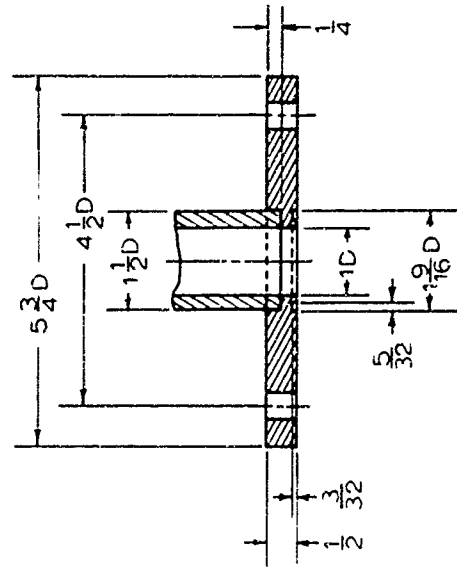


SECTION C-C

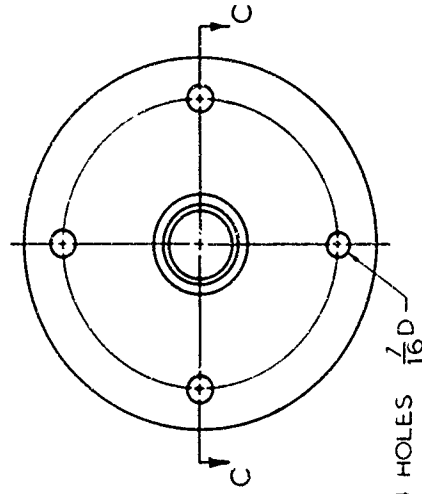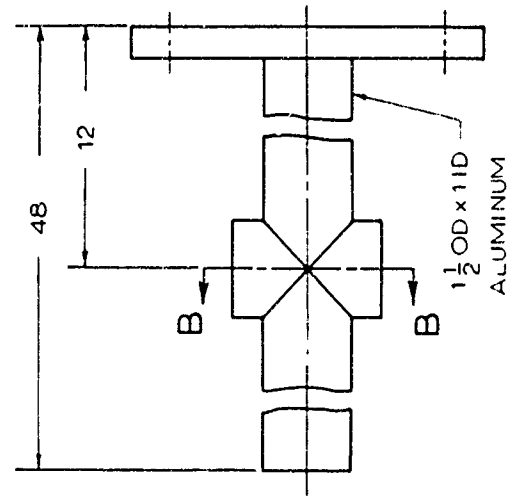


DRILL 4 HOLES $\frac{7}{16} D$




SECTION A-A






SECTION B-B




SECTION C-C

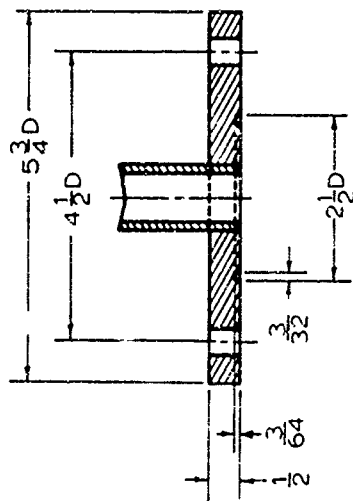


SECTION D-D

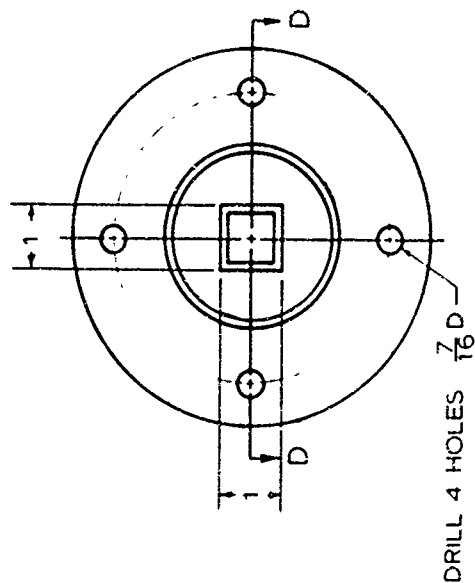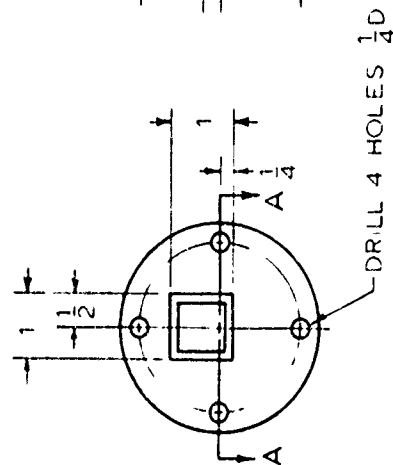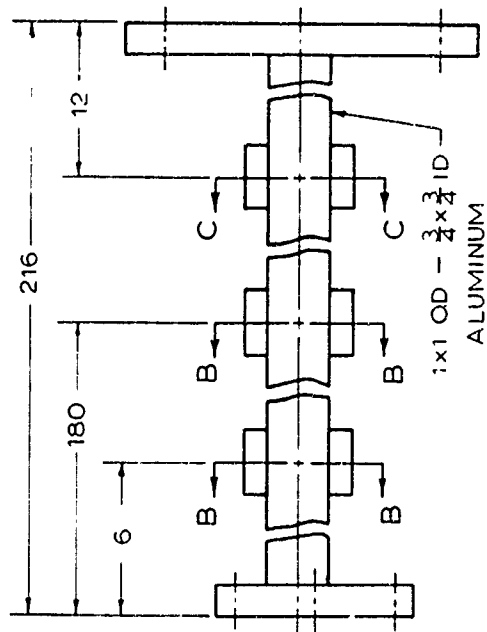


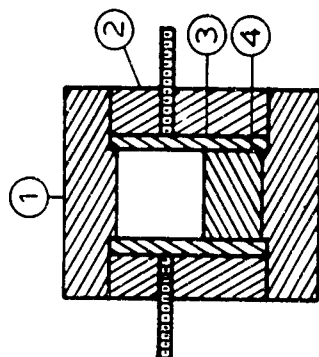


SECTION A-A





SECTION B-B

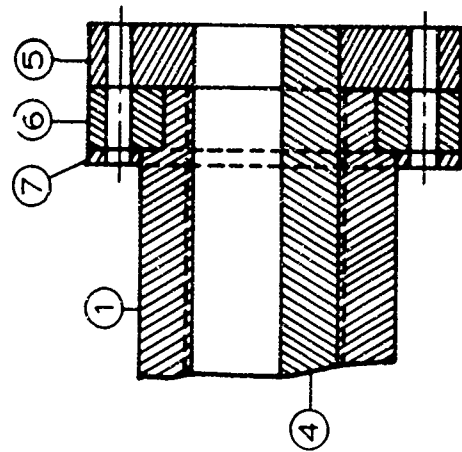



FLANGE DETAIL

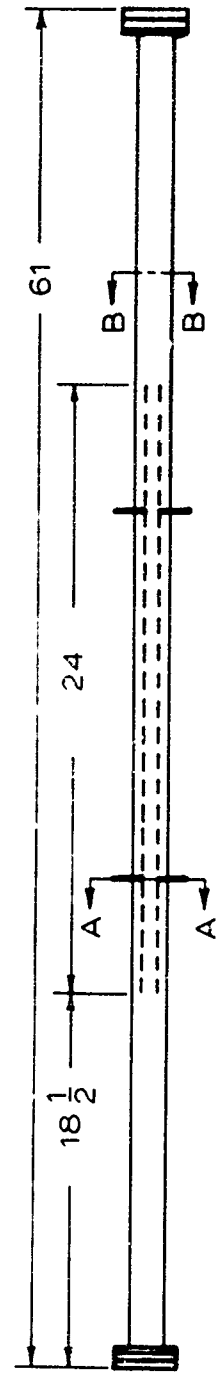

③ COPPER

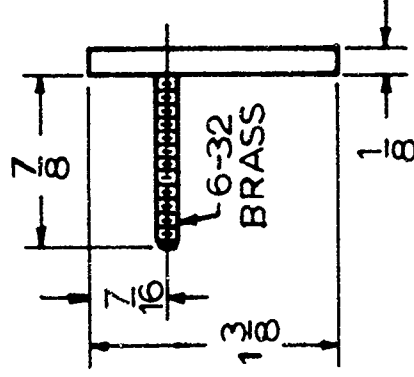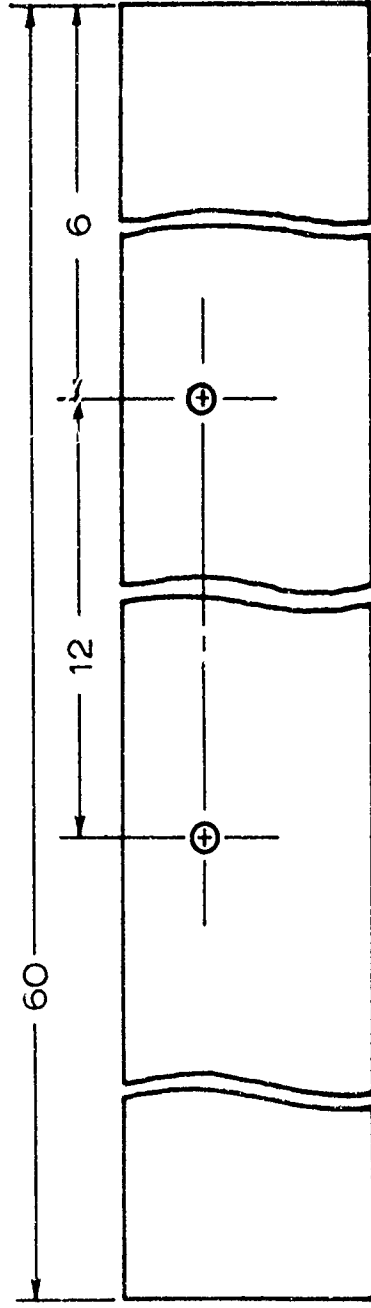


④ PLEXIGLASS

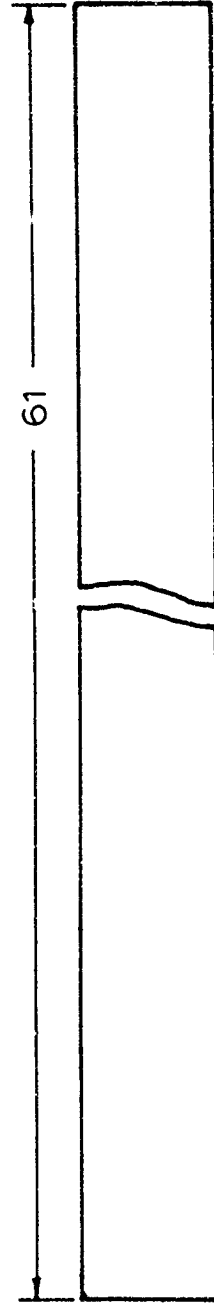


⑤

PLEXIGLASS


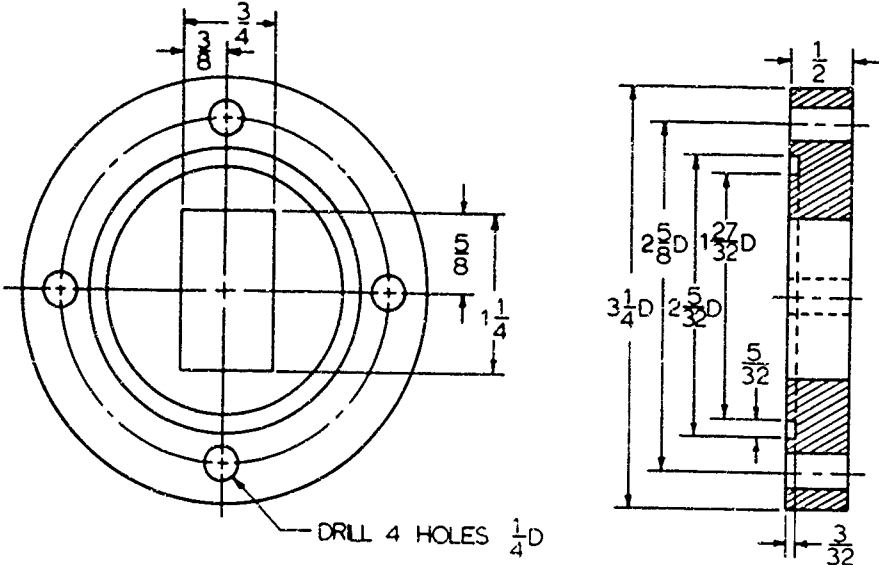


⑥



PLEXIGLASS

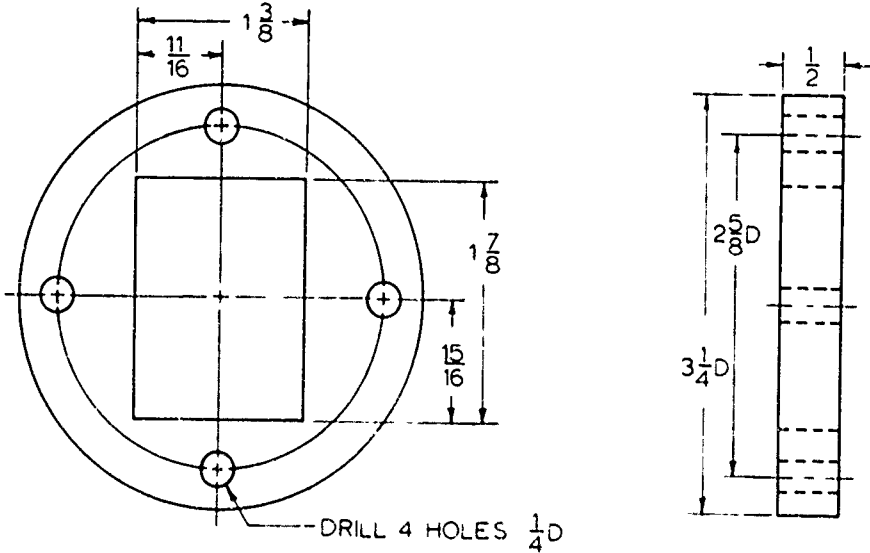



⑦ PLEXIGLASS

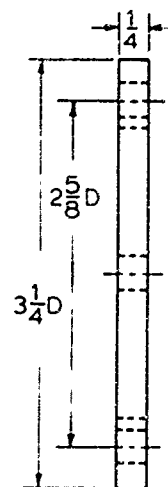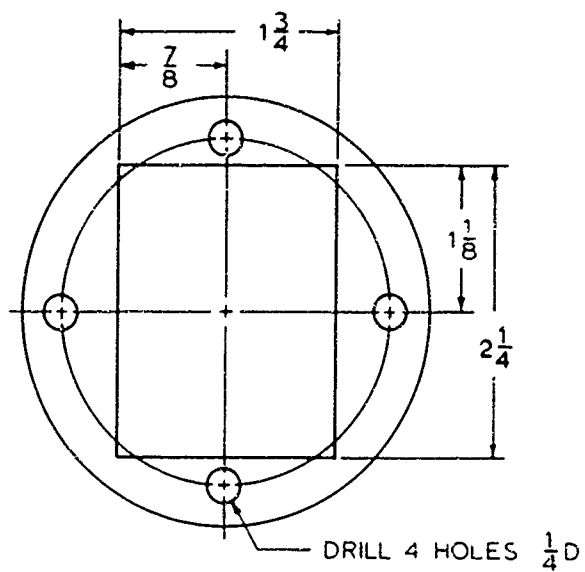


PLEXIGLASS

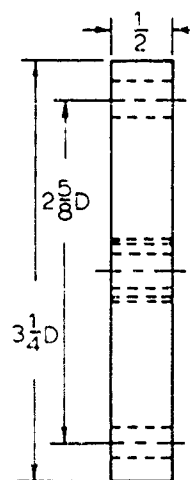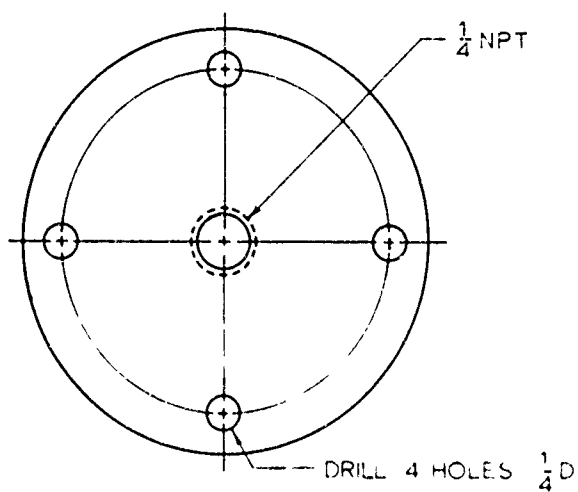



①

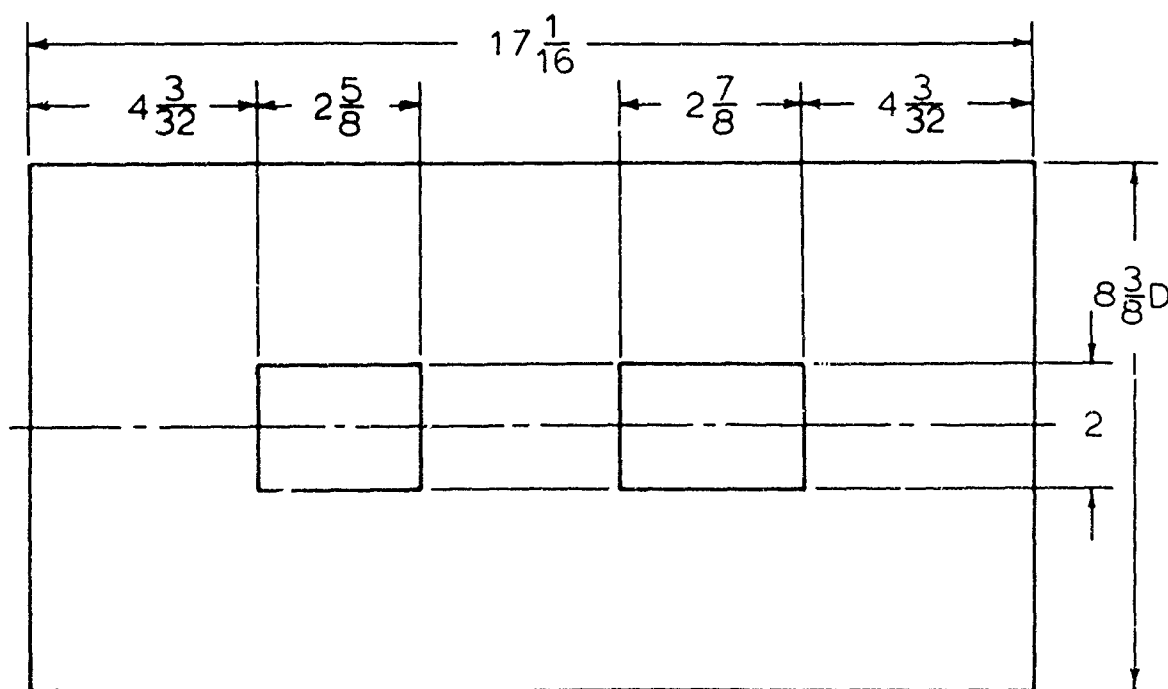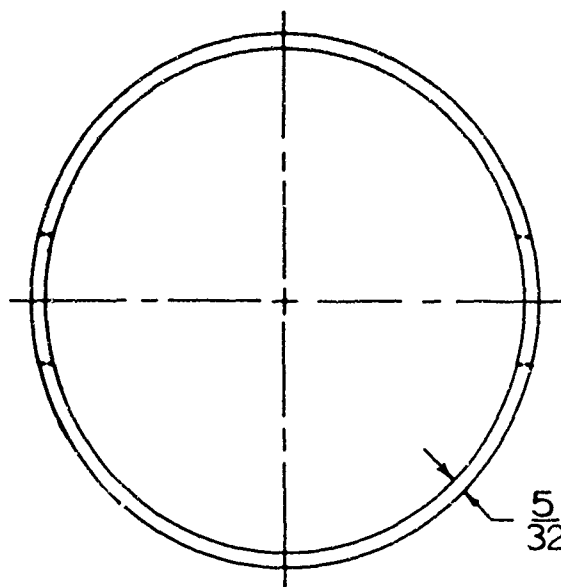


②

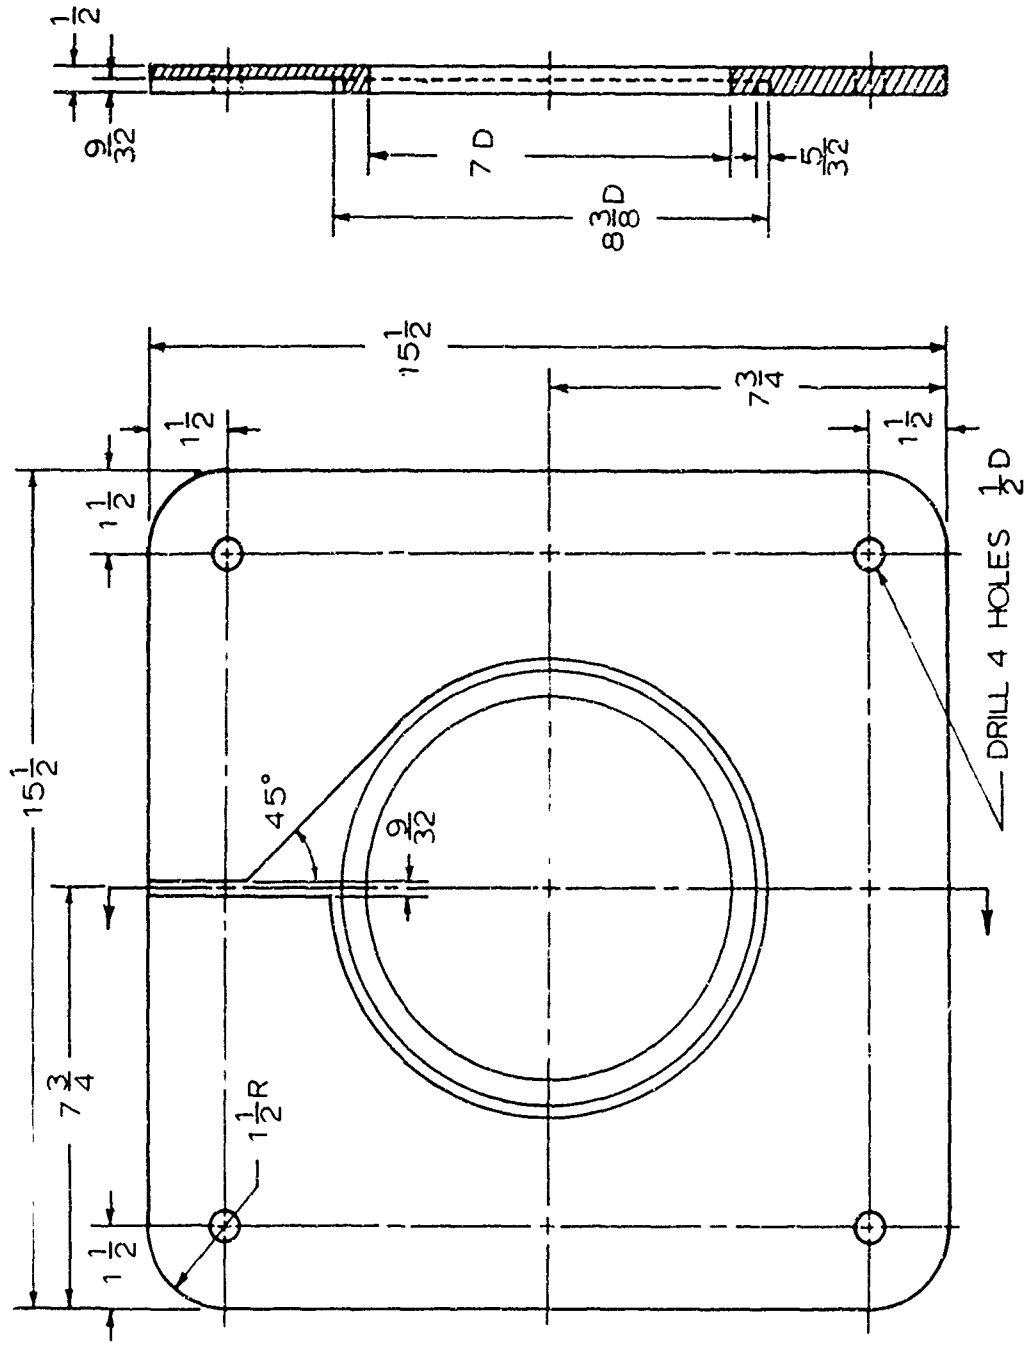

③

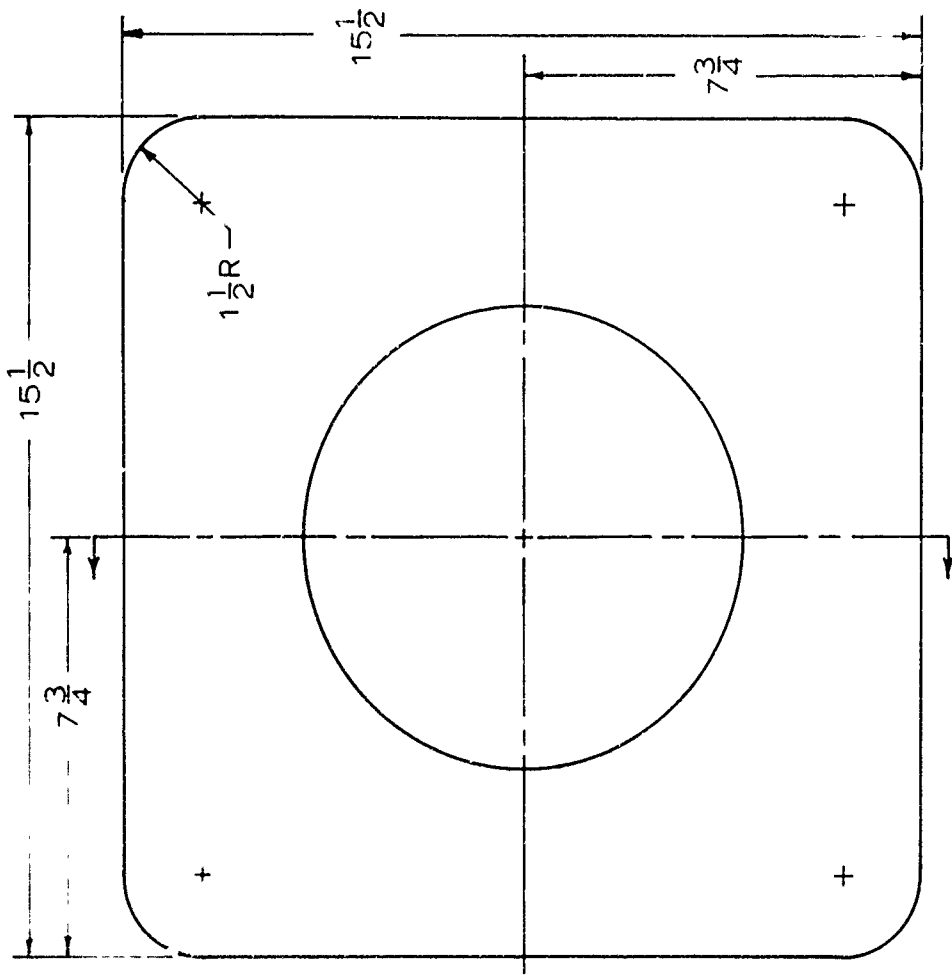

④

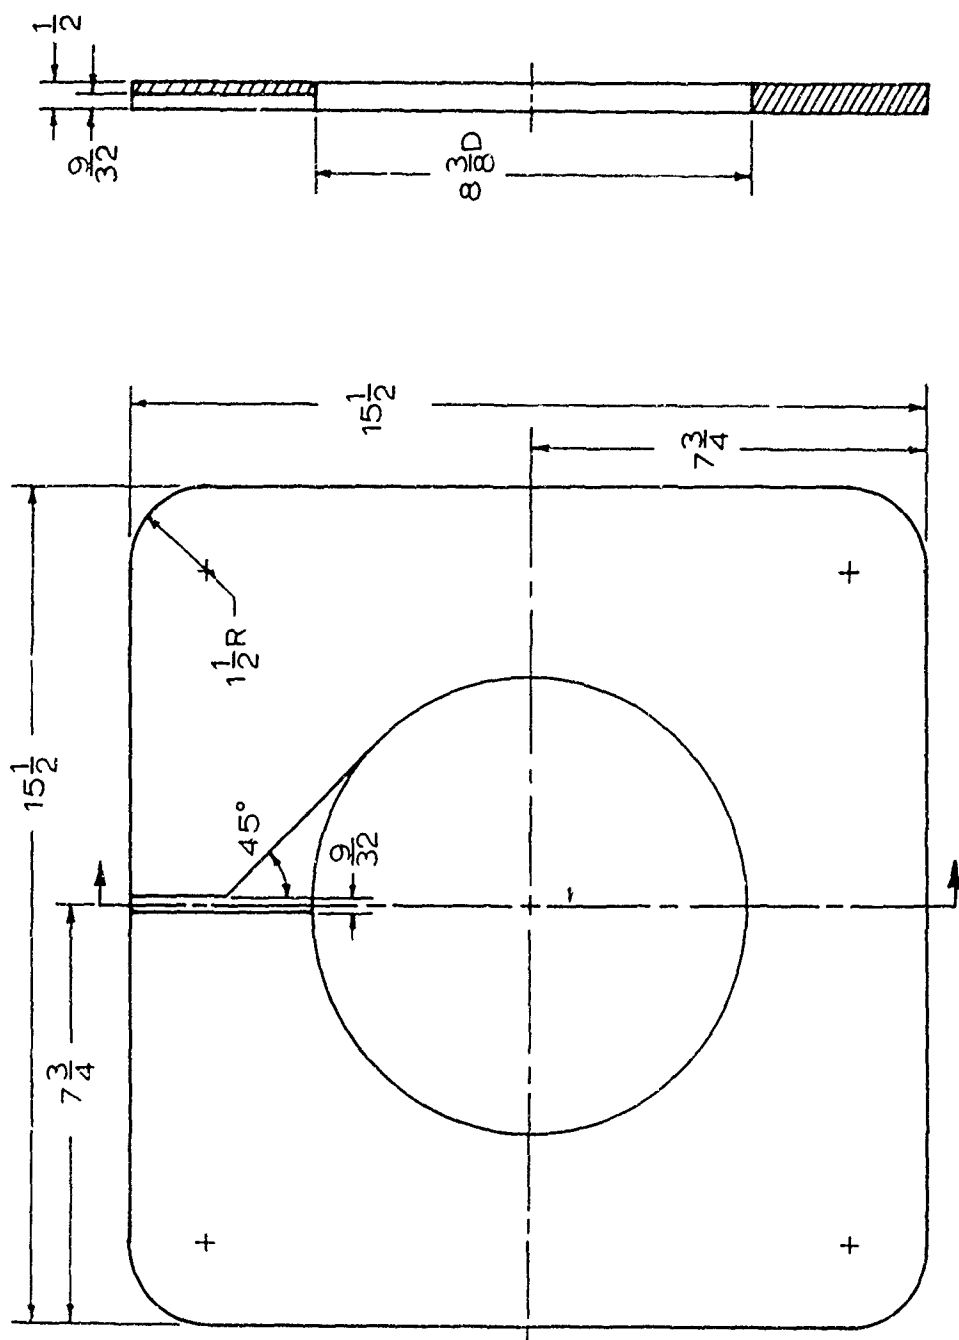

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1 ORIGINATING ACTIVITY (Corporate author) University of California College of Engineering Berkeley, California		2a REPORT SECURITY CLASSIFICATION UNCLASSIFIED
		2b GROUP
3 REPORT TITLE An Experimental Method for the Study of Interactions Between Detonation Waves and Magnetic Fields		
4 DESCRIPTIVE NOTES (Type of report and inclusive dates) Scientific - Technical Note. No. 3-67		
5 AUTHOR(S) (Last name, first name, initial) Eric A. Lundstrom, P. A. Urtiew and A. K. Oppenheim		
6. REPORT DATE June 1967	7a TOTAL NO OF PAGES 34	7b NO OF REFS 7
8a CONTRACT OR GRANT NO AFOSR 129-67	9a ORIGINATOR'S REPORT NUMBER(S) Report No. AS-67-7	
b PROJECT NO		
c	9b OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.	AFOSR 67-1895	
10 AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited		
11. SUPPLEMENTARY NOTES		12 SPONSORING MILITARY ACTIVITY Air Force Office of Scientific Research (OAR)
13 ABSTRACT Reported here is the design and construction of an experimental apparatus for the study of the influence of electromagnetic fields on the structure of detonation waves. The apparatus consists of a detonation tube having a 3/4 inch square test section with axial magnetic and transverse electric fields. The structure of the detonation wave is recorded by the use of the soot film technique.		

DD FORM 1473
1 JAN 64

UNCLASSIFIED

Security Classification

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Detonation Waves Magnetic Fields						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.

DD FORM 1473 (BACK)

1 JAN 64

UNCLASSIFIED

Security Classification